



VGA Computer Video + Digital Stereo Audio Transmitter and Receiver pack up to 1000-ft (TTY121+TRY251)



Qik Install pack is a twisted-pair transmitter and receiver pair with all necessary accessories like 5-ft input cable and a 50-ft CAT5e cable.

TTY121

Universal Transmitter for VGA Computer Video + Stereo Audio. TTY121 is a twisted-pair CAT5 Computer video and audio transmitter. It encodes Computer video and stereo audio signals and transmits them over twisted-pair CAT5 cable at a distance up to 1000-ft.

Key features:

- ❑ Transmit Computer video (VGA-UXGA) with stereo audio over a single twisted-pair CAT5 cable.
- ❑ Media distribution of VGA Computer video with stereo audio over a single twisted-pair CAT5 cable.
- ❑ Compact design easy to mount.
- ❑ Reduced cost and easy installation with use of standard, inexpensive, and flexible twisted-pair cabling.
- ❑ Transmits signal up to 1000-ft away at UXGA (1600x1200) resolution.
- ❑ Ground Loop Protection.
- ❑ Compatible with Line Level Stereo Audio Signals.


Front Panel Diagram



Back Panel Diagram



Application Diagram:

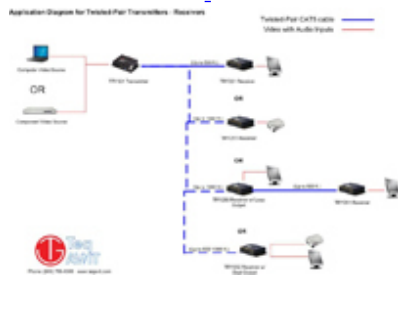

Specifications:

- Input** : 1x Computer Video on HD-15 F connector & Stereo Audio on 3.5mm jack.
- Output** : 1x Computer Video on HD-15 F connector 1x Computer Video & Stereo Audio on RJ45 connector.
- Signal** : Standard Computer, RGBHV, or YPbPr Component Video and unbalanced stereo audio w/ 60 Ohm impedance.
- Transmission Distance** : Up to 1000-ft @ UXGA (1600x1200).
- Size-Weight** : 3.0" W x 3.9"D x 1.2" H, 0.5 lbs.
- Power** : Included AC power adapter, DC 5V, 1.2A.
- Expansion** : Cascadable.
- Cable Compatibility** : CAT5e, Low-skew, CAT6, CAT5.
- Approval** : CE/UL/FCC part 15 Class A.
- Included Accessories** : AC Power Adapter, Audio Input Cable, User Guide.

TRY251

VGA Computer Video + Digital Stereo Audio Receiver up to 500-ft. TRY251 is a twisted-pair CAT5 computer video and audio receiver. It decodes computer video and digital stereo audio signals received over twisted-pair cables from a distance of up to 500-ft at UXGA (1600x1200) resolution. It features equalization, skew adjustment and gain compensation for long cable runs. Simply plug-in input signal cable through RJ-45 plug and receive output video and audio through HD-15 connector.

Key features:

- ❑ Transmit (or receive) Computer video (VGA-UXGA) with digital stereo audio over a single twisted-pair CAT5 cable.
- ❑ Media distribution of VGA Computer video with digital stereo audio over a single twisted-pair CAT5 cable
- ❑ Compact design easy to mount to display
- ❑ Reduced cost and easy installation with use of standard, inexpensive, and flexible twisted-pair cabling.
- ❑ Receiver can be located up to 500-ft away
- ❑ Equalization, skew adjustment and gain compensation.
- ❑ Compatible with Line Level Digital Stereo Audio Signals


Front Panel Diagram



Back Panel Diagram



Application Diagram:

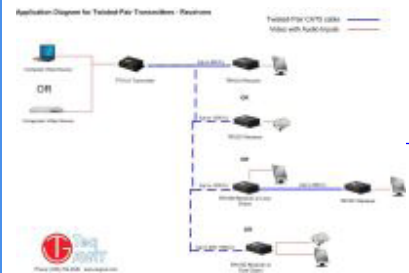

Specifications:

- Input** : 1x Computer Video & Digital Stereo Audio on RJ45 connector.
- Output** : 1x Computer Video on HD-15 F connector & Digital Stereo Audio on 3.5mm jack.
- Signal** : Standard Computer, RGBHV, or YPbPr Component Video and unbalanced digital stereo audio w/ 60 Ohm impedance.
- Transmission Distance** : Up to 500-ft @ UXGA (1600x1200)
- Size-Weight** : 3.0" W x 3.9"D x 1.2" H, 0.5 lbs.
- Power** : Included AC power adapter, DC 5V from 110V input
- Compatibility** : TTY111
- Cable Compatibility** : CAT5e, Low-skew, CAT6, CAT5
- Approval** : CE/UL/FCC part 15 Class A

